

fittingmadeeasy

....for venetians....


What you will need...

- a minimum of 4 **screws** and approximately-sized **raw plugs** if screwing into masonry
- a **screwdriver** to match your screws
- a **power drill**
- a **pencil**

Step One... (Please read all instructions before starting)


Inside Recess – Decide whether to fit to the window frame (**FACE FIX**), or whether to fit to the lintel (**TOP FIX**). If the window frame is **uPVC**, or if there are any **obstructions** in the way (catches, handles etc)

Outside Recess – If fitting outside the recess, measurement C will need to be the same on both sides. To work out C, minus B from A and divide the answer by 2. Follow instructions for **FACE FIX**.

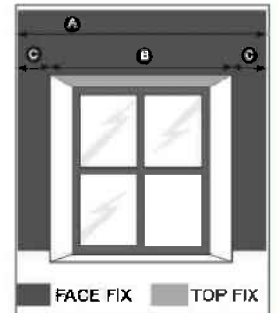

Step Two...



Place blind in fitting position and tilt forward to show ladder controls. When fitting the brackets, you will need to leave at least 5cm either side of any cords.

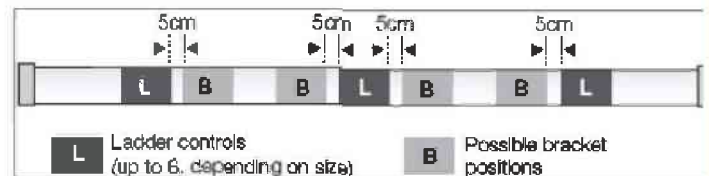

Step Three...

FACE FIX – Position bracket with white plastic spring **facing towards you**, and mark both holes B. Screw brackets in place. Use rawl plugs if fitting into masonry.

TOP FIX – Measure the distance that any **handles protrude** into the recess (**A**). Mark this measurement on the lintel and use it to position the back of the bracket. Mark the position of hole **B** and screw the bracket to the lintel using screws and rawl plugs.

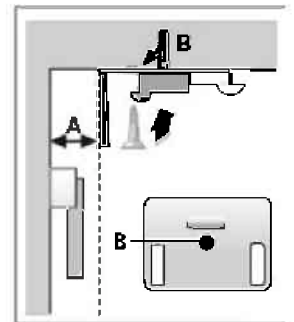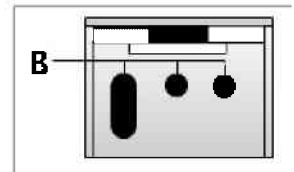

Step Four...

Fix the back of the headrail onto the lip at the back of the top of the bracket. Making sure the lip on the back of the headrail is secure on the bracket – rock the front of the headrail upwards **over the white spring** which will then **lock** the blind in place.

Final Steps...

Lowering the blind: unlock the cords by pulling gently to the left and release gently through the hand until the required drop is reached. Lock the cords by returning to the right. **Raising the blind:** with slats fully open, pull cords downwards until the desired height is reached. Lock by taking the cords to the right. **Tilting the blind:** rotate the wand clockwise or anti-clockwise to tilt the slats to the angle of your choice. **Enjoy your blinds!**

WARNING: Fire safety reasons, please keep all cords and chains out of the reach of children. All beds, cots and other furniture need to be moved away from the blinds.

Need Help? Phone our helpline:

01204 854 112



blinds made easy

quality made to measure blinds for the home

